



TOP LOADING AUTOCLAVE RANGE

95 | 120 | 135 Litres



The Astell Top Loading Range

95 | 120 | 135 Litres



SPECIFICATIONS	Capacity (Litres)	Chamber (usable) (Dia x Depth - mm)	Heaters in Chamber Models		Steam Generator Models	
			Overall Dimensions wxhxd in mm	Power Supply	Overall Dimensions wxhxd in mm	Power Supply
AMA250BT	95	456 x 450	660 x 940 x 840	1/3 Phase, N&E, 7/10kW	660 x 1070 x 1200	3 Phase, N&E, 14kW
AMA260BT	120	456 x 600	660 x 1070 x 840	1/3 Phase, N&E, 7/10kW	660 x 1070 x 1200	3 Phase, N&E, 14kW
AMA270BT	135	456 x 680	660 x 1150 x 840	1/3 Phase, N&E, 7/10kW	660 x 1150 x 1200	3 Phase, N&E, 14kW

OPTIONS CAPACITY

Part Name	Part ID	Dimensions (mm)	AMA250BT	AMA260BT	AMA270BT
Stainless Steel Basket	AAN042	400 (d) x 220 (h)	2	2	3
Stainless Steel Basket	AAN036	400 (d) x 400 (h)	1	1	1
Morrison Container	AAN056	390 (d) x 500 (h)	1	1	1

BOTTLE CAPACITY (Duran Type)

To the right are details of Duran bottles from 500ml to 2000ml. The first number indicates the number of a particular size bottle that can fit in the chamber and the second number indicates the quantity of AAN042 baskets required to achieve this.

Bottle Size	AMA250BT	AMA260BT	AMA270BT
500ml	26 (2)	26 (2)	39 (3)
1000ml	10 (1)	20 (2)*	20 (2)*
2000ml	5 (1)	10 (2)*	10 (2)*

* As the Duran height exceeds the basket height, in this configuration the second basket would rest on the top of the Durans in the lower basket.

“Available in 3 chamber sizes, the Astell Top Loading range are tried and tested models that stand the test of time and are used all over the world”

	Heaters in Chamber Integrated Heaters	Steam Generator Integrated Generator (or in-house steam supply)
Temperature range of 100°C to 138°C (0.2 - 2.4 Bar)	☒	☒
5.7" Colour Touch Screen Display & External Pressure Gauge	☒	☒
5 Preprogrammed Cycles (and up to 50 available)	☒	☒
Password levels (to stop low level users making changes)	☒	☒
Internal memory for storing up to 5,000 cycles	☒	☒
Delayed start facility	☒	☒
Media Holdwarm facility	☒	
DATA OPTIONS		
Integral Data Printer	☐	☐
RS232 for Hyperterminal data output	☐	☐
USB for USB Drive data output	☒	☒
Ethernet for remote screen viewing (requires VNC software)	☐	☐
Ethernet for downloading cycle data (requires FTP software)	☐	☐
LOAD SPECIFIC OPTIONS		
Load Sensed Process Timing (PT100 Sensor)	☐	☐
Pulsar Freesteaming for improved steam penetration	☐	
Basic Vacuum (Pre vacuum air removal, Post vacuum cooling)	☐	
Advanced Vacuum (For porous loads)		☐
Heated jacket for drying (requires Advanced Vacuum)		☐
CAT 3 (BSL3) Compliance	☐	☐
Air Ballast (For fluid loads, requires load sensed process timing and cooling)	☐	☐
COOLING OPTIONS		
Fan (Air) Cooling	☐	
Water Cooling (Coils)	☐	
Water Cooling (Jacket)		☐
SERVICES		
Automatic Chamber Fill (Mains supply required)	☐	
Automatic Chamber Drain (Heat resistant drain required)	☐	
Drain Cooling (for plastic drains)	☐	☐
Water Softener (Heaters in Chamber models would also require Autofill)	☐	☐
Blowdown Vessel (for steam generator cleaning)		☐
POWER		
Power Requirements (Contact us for more details)	1/3 Phase, 7/10kW	3 Phase, N&E, 14kW

Water Requirements: A water supply is required for models with Autofill, Drain Cooling or a Steam Generator fitted; 15mm bsp; 2-6 Bar, 4L/min. Units fitted with Vacuum require 15 litres per minute.

Drain Requirements: Heat resistant drains (or Drain Cooling) are required for all models. This must be floor level, 35mm, non-manifolded, capable of withstanding freeflowing steam. This must be free vented to atmosphere if sealed.

☒ Standard ☐ Optional

Colour touch screens as standard

All Astell Scientific autoclaves, steam generators and effluent decontamination systems (EDS) incorporate the latest innovations in control system technology, providing colour touchscreen controllers as standard throughout the range.

Astell colour touch screen control systems are an advance in sterilization control technology. Bringing together years of unrivalled experience, they produce a user friendly, fully automatic control system designed to meet and exceed the expectations of the most demanding laboratories and centres of sterilization.

The controller consists of a wipe clean touch screen measuring 122mm x 94mm and is based on an industrial PLC system, combined with a number of analogue and digital input/output modules. The controller software has been developed by Astell for the precision control of all our autoclaves and sterilizers.

Standard Features

Icon driven menu system

Simple cycle selection

Continual cycle monitoring

SECURE

Data archiving for up to 5,000 cycles

Multiple user access levels and multi-level password protection

User log

FLEXIBLE

Ability to program up to 50 cycles

Program new cycles, modify, duplicate or rename existing cycles

Delayed start facility

Hold warm facility (if applicable)

INFORMATIVE

Digital display of pressure/temperature

Cycle counter, stage timer, cycle timer and stage display

Print any cycle from the data archive logs (printer required)



SUPPORTIVE

Fault diagnosis

Safety valve test cycle

Machine service timer

Fault history log

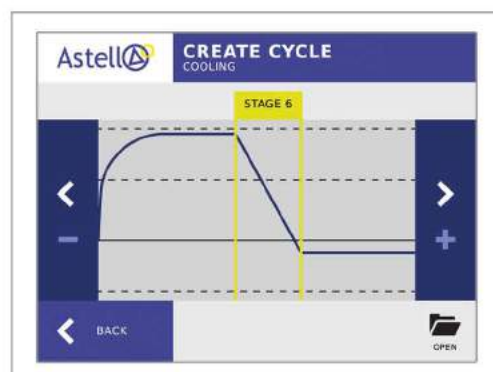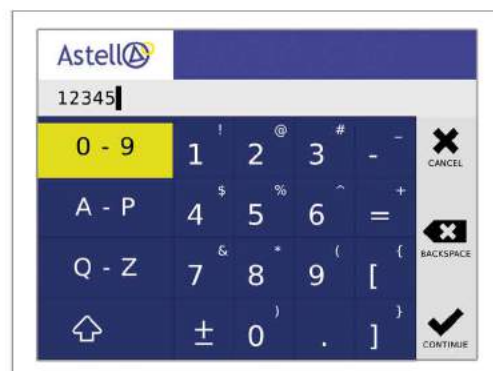

Standards Compliance

ISO 9001:2008 Pressure Equipment Directive (PD/97/23/EC)
 ISO 13485:2012 Medical Devices Directive (93/42/EC & 2007/47/EC)
 ISO 17025:2005 (UKAS)
 IEC 61010
 ASME "U" VIII
 EN285* HTM2010* (*Where applicable)
 Operating Range: 100°C - 138°C (0.2 - 2.4 Bar)





WolfLabs

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel : 01759 301142

Fax : 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.