

HiPette

Fully Autoclavable Mechanical Pipette

The DLAB new generation fully autoclavable mechanical pipette has the best ergonomic design and ultralight weight. It has been designed keeping in mind the human form and human factors to offer smooth and effortless ergonomic pipetting experience. It is UV sterilisable and resistant to strong chemical corrosion. In addition, the volume lock helps protect from volume changing accidentally, and achieve reliable pipetting of smallest volume of liquids.



Ultra-light ergonomic design

Light weight and light pipetting force with soft range adjustment and piston movement offers effortless & fatigue-less pipetting experience.




Accurate pipetting

Special material and the updated components & technologies effectively reduces the operating force for accuracy, precision and reliability.



Complete sterilization

The best in class pipette material used is fully autoclavable. It gives better protection against chemical & physical corrosion, and offers enhanced UV resistance for higher durability.

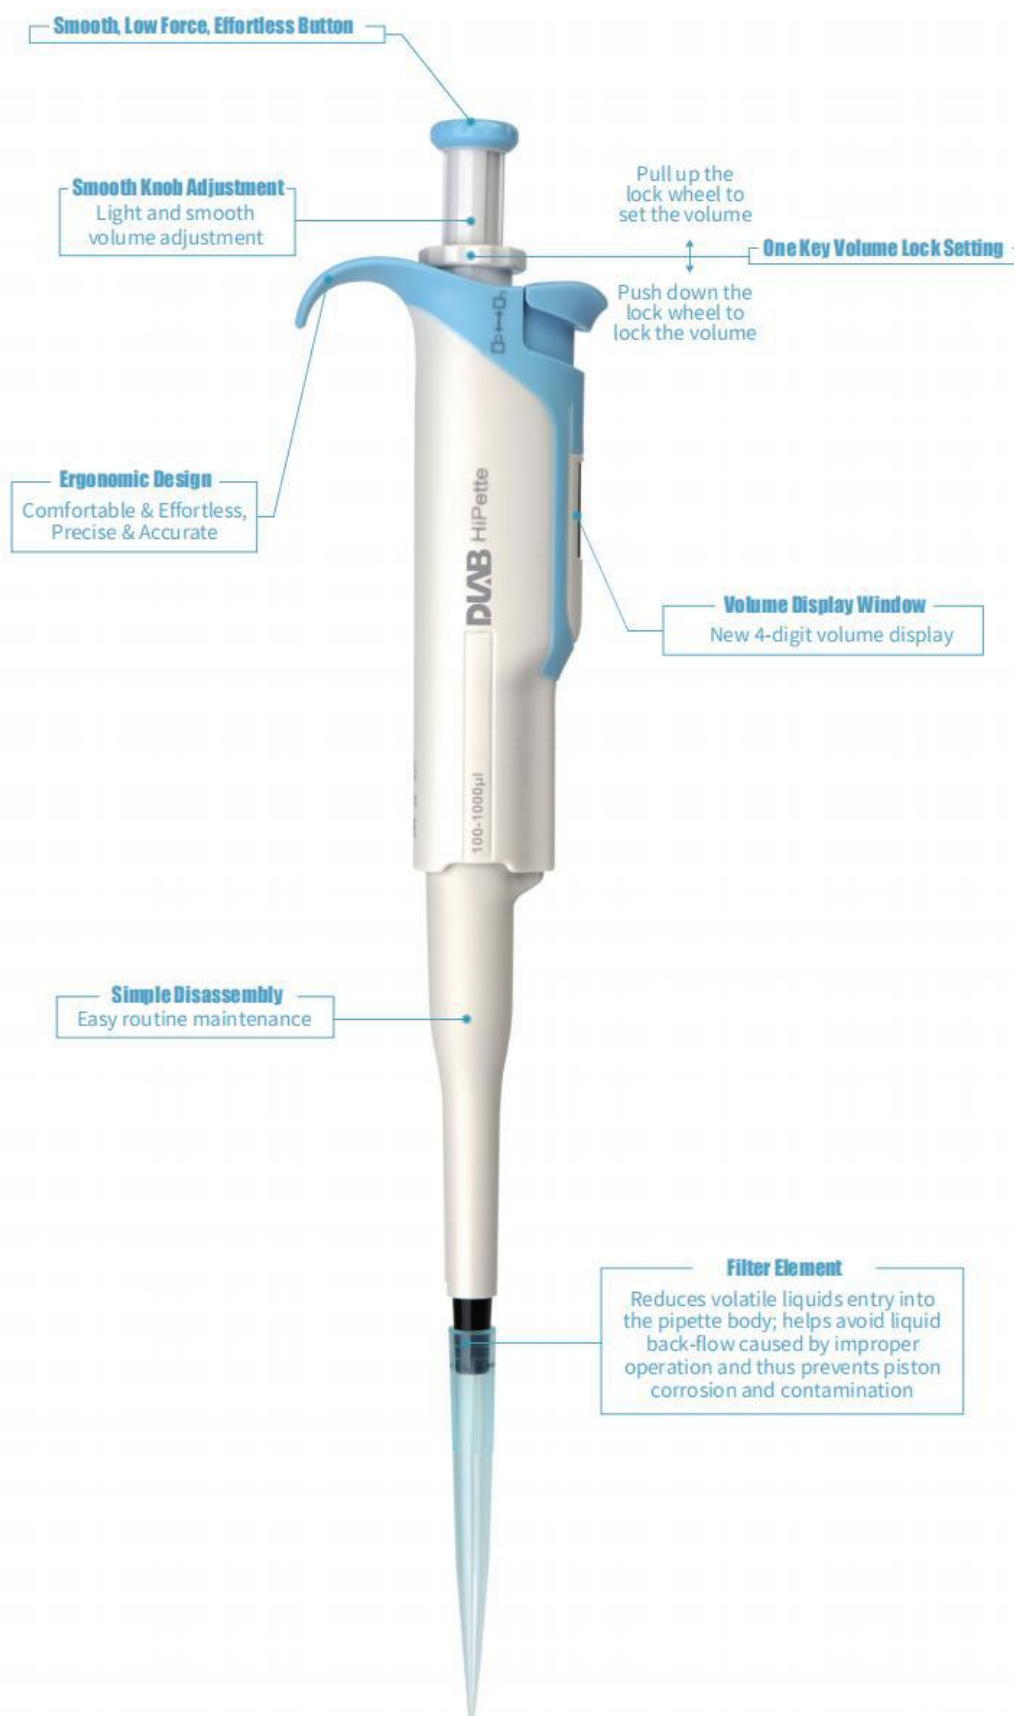

Specifications

SINGLE-CHANNEL ADJUSTABLE VOLUME PIPETTES
(12 MODELS, COVERING 0.1 μ L~10mL.)

Volume Range	Increment	Test Volume	Systematic Error		Random Error	
μ L	μ L	μ L	μ L	%	μ L	%
0.1-2.5	0.002	2.5	± 0.04	± 1.4	± 0.02	± 0.7
		1.25	± 0.03	± 2.5	± 0.02	± 1.5
		0.25	± 0.03	± 12.0	± 0.02	± 6.0
0.5-10	0.01	10	± 0.10	± 1.0	± 0.04	± 0.4
		5	± 0.08	± 1.5	± 0.04	± 0.8
		1	± 0.03	± 2.5	± 0.02	± 1.8
2-20	0.02	20	± 0.20	± 1.0	± 0.06	± 0.3
		10	± 0.12	± 1.2	± 0.06	± 0.6
		2	± 0.10	± 5.0	± 0.03	± 1.5
5-50	0.05	50	± 0.45	± 0.9	± 0.15	± 0.3
		25	± 0.35	± 1.4	± 0.20	± 0.8
		5	± 0.15	± 3.0	± 0.08	± 1.6
10-100	0.1	100	± 0.80	± 0.8	± 0.20	± 0.2
		50	± 0.50	± 1.0	± 0.15	± 0.3
		10	± 0.30	± 3.0	± 0.10	± 1.0
20-200	0.2	200	± 1.20	± 0.6	± 0.40	± 0.2
		100	± 1.00	± 1.0	± 0.30	± 0.3
		20	± 0.50	± 2.5	± 0.14	± 0.7
30-300	0.2	300	± 1.80	± 0.6	± 0.60	± 0.2
		150	± 1.50	± 1.0	± 0.45	± 0.3
		30	± 0.75	± 2.5	± 0.21	± 0.7
100-1000	1	1000	± 6.00	± 0.6	± 2.00	± 0.2
		500	± 5.00	± 1.0	± 1.00	± 0.2
		100	± 3.00	± 3.0	± 0.60	± 0.6
1000-5000	5	5000	± 30.00	± 0.6	± 10.00	± 0.2
		2500	± 15.00	± 0.6	± 7.50	± 0.3
		1000	± 12.00	± 1.2	± 3.00	± 0.3
500-5000	5	5000	± 30.00	± 0.6	± 10.00	± 0.2
		2500	± 15.00	± 0.6	± 7.50	± 0.3
		500	± 12.00	± 2.4	± 3.00	± 0.6
2000-10000	10	10000	± 60.00	± 0.6	± 20.00	± 0.2
		5000	± 40.00	± 0.8	± 10.00	± 0.2
		2000	± 30.00	± 1.5	± 6.00	± 0.3
1000-10000	10	10000	± 60.00	± 0.6	± 20.00	± 0.2
		5000	± 40.00	± 0.8	± 10.00	± 0.2
		1000	± 30.00	± 3.0	± 6.00	± 0.6

User calibration should refer to the industrial standard ISO8655-2.



WolfLabs

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel : 01759 301142

Fax : 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.