

MODERN & REVOLUTIONARY

What to look for in a good sieve shaker

One of the most important characteristics of a good sieve shaker is to deliver reliable and reproducible sieving results at any time. Furthermore it should reach an ultimate end point in the shortest sieving time possible in order to save valuable working hours.

In order to provide a long, trouble free life the construction of a sieve shaker is very important. An electromagnetic drive, for example, has the distinct advantage of no mechanical parts that might need servicing or replacing.

Other useful features that can increase performance, shorten sieving time or simply make life easy are: **amplitude control, continuous or intermittent vibration control, timer, correct and consistent clamping pressure, anti-vibration feet and low noise level.**

At Endecotts our sieve shakers are designed and engineered around the key features listed above, ensuring that the design performance provides the optimum sieving action to the sieves to give rapid accurate results.

As a manufacturer of test sieves we understand how sieves and shakers interrelate. This knowledge is built into every model. So too are the same skills and exacting engineering standards that have made Endecotts the finest test sieves in the world.

Our new line of laboratory and heavy duty sieve shakers:

precise & efficient,
easy to operate,
featuring a fresh look




Laboratory

	Air Sizer 200	Minor 200
Range:	20 µm - ~ 4 mm	20 µm to 125 mm
Drive / sieving motion:	dispersion by air jet	electromagnetic
Amplitude / Speed:	5 - 55 rpm (nozzle speed)	~ 1.6 mm (depending on loading), fixed
Sieve diameter:	203 mm / 8" premium air jet sieves	100 mm / 200 mm, 3" / 8"

Features

Electromagnetic Drive

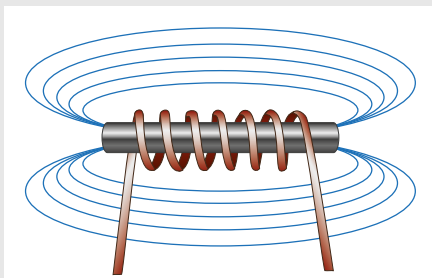

An electromagnetic drive produces an ideal throwing motion that disperses material equally over the whole sieving surface. Furthermore it is virtually maintenance-free and extremely quiet in operation.

3D Performance



Vertical vibration is generated by the on/off frequency of the electromagnetic drive. However, vertical vibration is not enough to impart the correct movement for sieving. The shaker also needs to twist the sieve stack - this rotating action ensures the sample passes over the full surface of the sieve and the maximum number of apertures to give rapid accurate results

Avoiding blocked apertures



A feature of the 3D sieving action is the rapid vertical movement imparted by the shaker. The movement is continuously helping to clear apertures and avoid them blinding.



Laboratory

Heavy Duty


Octagon 200	Octagon 200CL	EFL 300	Titan 450
20 µm to 125 mm	20 µm to 125 mm	20 µm to 40 mm	20 µm to 125 mm
electromagnetic 3D	electromagnetic 3D	electromagnetic 3D	electromagnetic 3D
0 - 3 mm, digital setting in 10 steps	0 - 3 mm, digital setting in 0.1 mm steps, "Closed Loop" amplitude control	0 - 2 mm, digital setting in 10 steps	0 - 2 mm, digital setting in 10 steps
100 mm / 200 mm, 3" / 8"	100 mm / 200 mm, 3" / 8"	100 / 150 / 200 / 203 / 250 / 300 / 315 mm, 3" / 8" / 12"	250 / 300 / 315 / 350 / 400 / 450 mm, 12" / 18"

Anti-Vibration Feet



Anti-Vibration Feet maintain optimum performance and avoid shaker 'walking'.

Unique Clamping

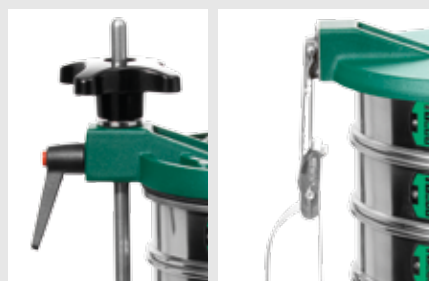

Endecotts shakers are fitted with a unique clamping device enabling the clamp plate to be fitted in seconds. It also ensures the clamp plate secures the sieves with consistent pressure to provide consistent results and longer sieve life.

Extensive Control



Most Endecotts shakers are fitted with a high degree of control over all shaker functions - a feature extremely useful for many materials and in many industries.

**NEW HEAVY
DUTY SHAKERS**

EFL 300

The new EFL 300 is the refined and improved version of our well-proven sieve shaker for sieve diameters of up to 300 mm. It now features a new, more powerful and low noise drive concept while at the same time being exceptionally robust and reliable - a real workhorse!

The EFL 300 is very versatile. The heavy electric motor is replaced by the electromagnetic system found in all modern sieve shakers. Its lighter form means that it can be either floor standing or even bench mounted making it suitable for both, laboratory and industrial environments. Sieving parameters are set by the remote control unit. Its functions are logical and very simple to operate.

Advantages

- Heavy duty shaker
- Electromagnetic drive
- Quick release clamping system ensures consistent clamping pressure
- Low noise level
- Floor or table-mounted
- Fitted with anti-vibration feet
- Suitable for wet or dry sieving
- AASHTO T 27 compliant



Specifications	EFL 300
Range	20 µm to 125 mm
Drive / sieving motion	electromagnetic 3D
Max. batch / feed capacity	6 kg
Max. number of sieves	6 full height / 12 half height (300 mm sieves)
Amplitude	0 - 2 mm, digital setting in 10 steps
Time display	digital, 0:10 - 99:50 min:sec (external unit)
Suitable for dry sieving	yes
Suitable for wet sieving	yes
Sieve diameter	100 / 150 / 200 / 250 / 300 / 315 mm 3" / 8" / 12"
Clamping devices	quick-release clamping system (included)
Model	floor or benchtop
Protection code	IP 54
Electrical supply	different voltages available
Power connection	1- phase
Ø x H	427 x 240 mm
Net weight	~ 47 kg



WolfLabs

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel : 01759 301142

Fax : 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.