



Multiparameter Bluetooth® Portable pH/EC/OPDO® Meter





Stainless steel, weighted protective guard

HI98494 Multiparameter Bluetooth® portable pH/EC/OPDO® meter

pH, ORP, EC, TDS, Resistivity, Salinity, Seawater σ , Dissolved Oxygen, Atmospheric Pressure and Temperature

- **Bluetooth connectivity**
 - Retrieve data logs with Hanna Lab app for either sending by e-mail or download to a smart device for review
- **Waterproof**
 - IP67 rated waterproof, rugged enclosure for meter, IP68 for probe
- **Digital probe**
 - Digital probe with built-in temperature sensor and three ports for pH (ORP), EC and optical DO sensors
 - Color coded, field replaceable sensors
 - Auto-sensor recognition
 - Stainless steel, weighted protective guard
- **Quick calibration feature**
- **Automatic barometric pressure compensation**
- **Automatic temperature compensation**
- **Logging**
 - Automatic interval logging of up to 45,000 samples
 - Log-on-demand to store measurement data
- **GLP**
 - GLP data provides data from previous five calibrations to ensure Good Laboratory Practices are met
- **Dedicated help key**
 - On-screen context specific help is readily available at the press of a button
- **Backlit LCD display with multifunction virtual keys**
- **Intuitive keypad**
 - Dedicated and virtual soft keys
- **USB type-C**
 - Computer connectivity for transferring logged data as .CSV file
 - Port used for recharging built-in lithium-ion battery
- **Dual power source**
 - Meter operates on built-in lithium-ion battery
 - Meter automatically switches to common alkaline batteries as backup power source

Feature Overview




Measurements

HI98494 can display from 1 to 12 parameters on the high contrast backlit LCD. The pH, EC and DO measurements are automatically compensated for temperature variations. Dissolved oxygen measurements are automatically compensated for barometric pressure and salinity.



Data Logging

HI98494 can be used to log one data point or do interval logging for continuous logging at a specified interval. All logs have the option to store data into a named lot and the ability to add remarks. Both help to provide for meaningful data including notes on local environmental conditions.

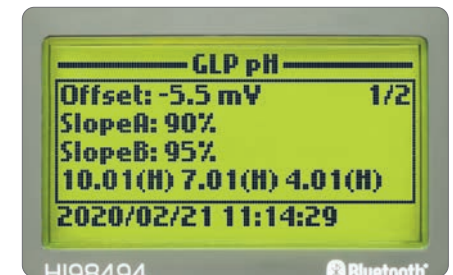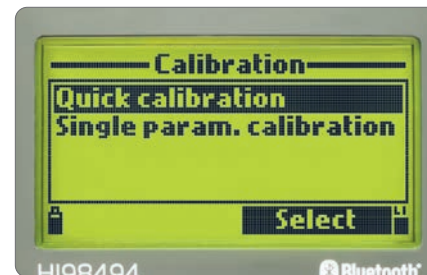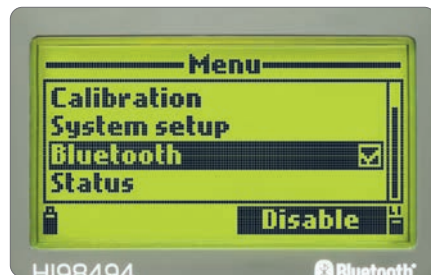

Bluetooth® 5.0 Connectivity

HI98494 offers the ability to connect wirelessly to a smart device running the Hanna Lap App. Using the app, log lots can be e-mailed or downloaded for review.

Dual Power Source

The meter operates on a built-in lithium-ion battery. When the rechargeable battery is low the meter will automatically switch to the 1.5 AA alkaline batteries.

Quick-Calibration

Quick Calibration provides a speedy, single point calibration for pH, conductivity, and dissolved oxygen. Standard calibration options are available including pH up to three points, conductivity at one point and dissolved oxygen up to two points.

GLP Data

Calibration information is captured along with time and date stamp. Information includes standard calibration values along with other values that have an impact on the measurement. GLP data is stored with logged data.



Hanna Lab


Log Detail > TE

#Rec	Date	Temp(K)	pH
1	02/19/2020 19:01:28	298.08	7.43
2	02/19/2020 19:01:29	298.08	7.43
3	02/19/2020 19:01:30	298.07	7.32
4	02/19/2020 19:01:31	298.07	7.32
5	02/19/2020 19:01:32	298.07	7.32
6	02/19/2020 19:01:33	298.07	6.63
7	02/19/2020 19:01:34	298.07	6.68
8	02/19/2020 19:01:35	298.06	6.91
9	02/19/2020 19:01:36	298.06	6.93
10	02/19/2020 19:01:37	298.06	7.04
11	02/19/2020 19:01:38	298.06	7.07
12	02/19/2020 19:01:39	298.06	7.10
13	02/19/2020 19:01:40	298.06	7.12
14	02/19/2020 19:01:41	298.06	7.17
15	02/19/2020 19:01:42	298.06	7.18
16	02/19/2020 19:01:43	298.06	7.17
17	02/19/2020 19:01:44	298.05	7.20
18	02/19/2020 19:01:45	298.05	7.23
19	02/19/2020 19:01:46	298.05	7.26
20	02/19/2020 19:01:47	298.05	7.28
21	02/19/2020 19:01:48	298.04	7.29
22	02/19/2020 19:01:49	298.04	7.30
23	02/19/2020 19:01:50	298.04	7.30
24	02/19/2020 19:01:51	298.04	7.30
25	02/19/2020 19:01:52	298.04	7.30
26	02/19/2020 19:01:53	298.04	7.30
27	02/19/2020 19:01:54	298.04	7.30
28	02/19/2020 19:01:55	298.04	7.30
29	02/19/2020 19:01:56	298.04	7.30
30	02/19/2020 19:01:57	298.04	7.30

Bluetooth®


Using the Bluetooth connection the data can be transferred to a smart device for review or shared as an e-mail.

Bluetooth® and Hanna Lab App Compatibility

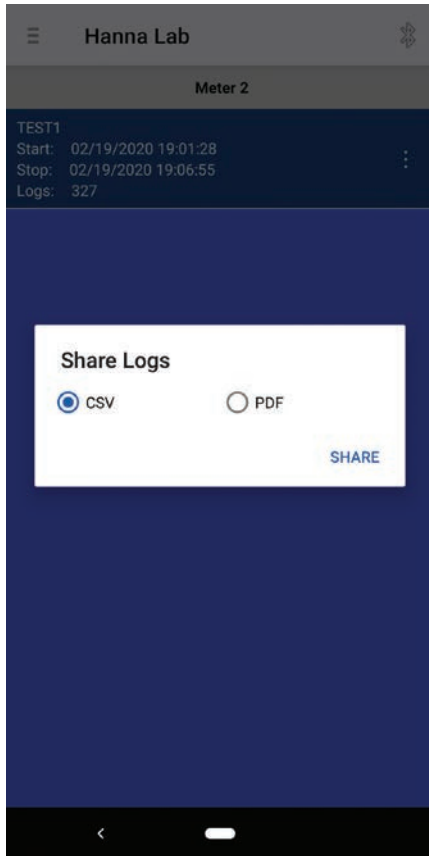


Share

Logs can be shared as a .CSV or .PDF file when being e-mailed.

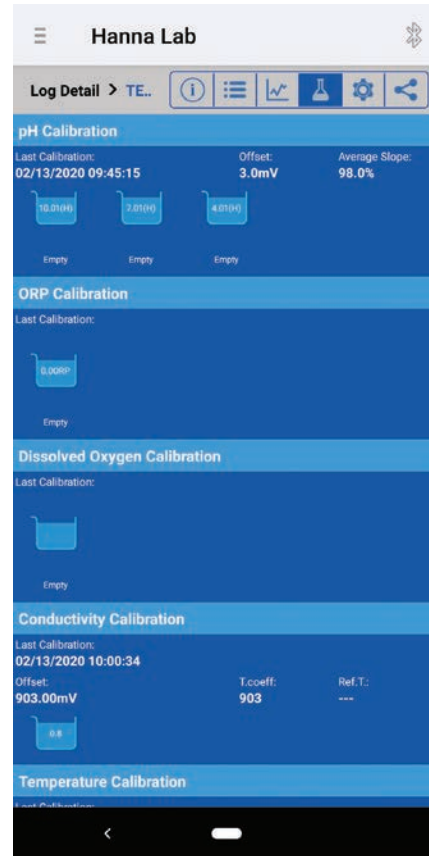


GLP

Comprehensive GLP data can be reviewed for all parameters when the logged data is downloaded to a smart device.

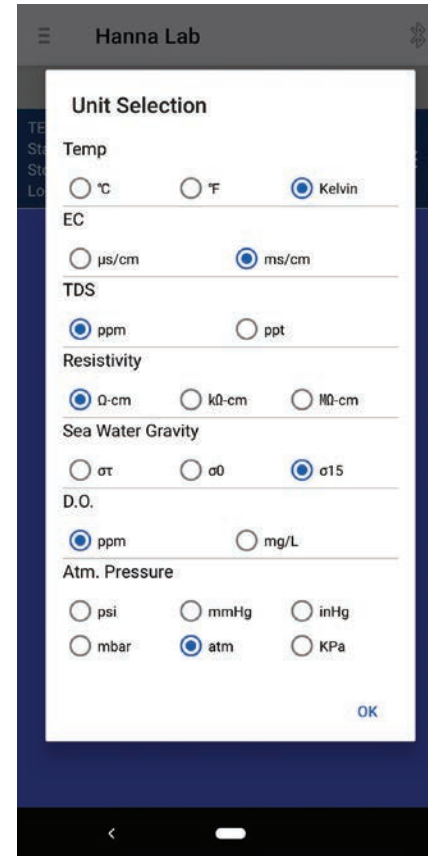

Unit Selection

When reviewing data on a smart device there is an option to select the measurement units to be displayed independently of the meter settings.

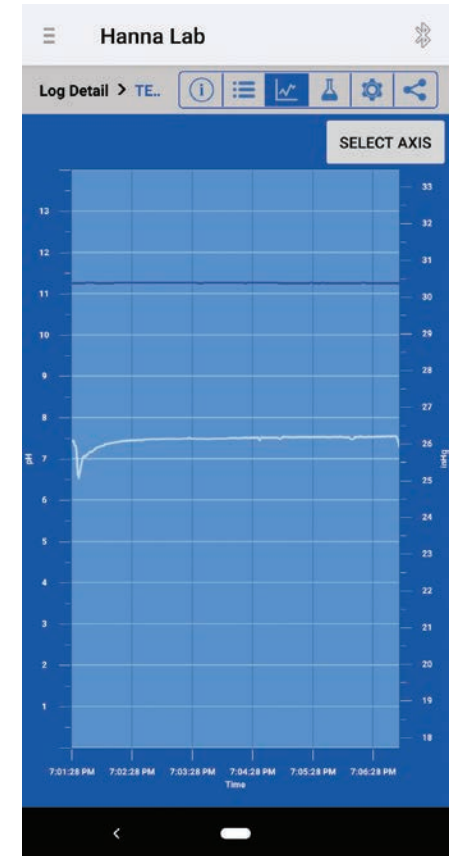

Data Graphing

For trend analysis the Hanna Lab App offers the option to graph logged data.



Waterproof Probe Connection and USB Type-C

Data Transfer & Charging

The USB Type-C port provides for easy data transfer to memory stick, PC, or other compatible devices and is used to charge internal lithium-ion battery.

Waterproof Quick Connect DIN Connector

The meter connects to the multiparameter probe through a single waterproof connector and makes attaching and removing the probe quick and easy. The meter automatically detects the probe when connected.



Easy sensor removal with hex key

Multiparameter Probe and Sensors

Multi-function Sensor

- Quick sensor replacement
 - Sensor replacement is quick and easy with field replaceable, screw type connectors and are color coded for easy identification. These meters automatically recognize sensors.

Optical Dissolved Oxygen Smart Caps

The optical dissolved oxygen sensor uses a smart cap that has an RFID tag that stores calibration coefficients unique to each cap. The RFID keeps track of the age of the cap and alerts the user when it should be replaced.



Probe Specifications	HI7698494	
Sensor Inputs	three (pH or pH/ORP, DO, EC)	
Sample Environment	fresh, brackish, seawater	
Waterproof Protection	IP68	
Operating Temperature	-5 to 55°C	
Storage Temperature	-20 to 70°C	
Maximum Depth	20 m (66')	
Dimensions (without cable)	342 mm (13.5"); 46 mm (1.8") dia	
Weight (without sensors)	570 g (20.1 oz.)	
Cable Specification	multistrand-multiconductor shielded cable with internal strength member rated for 68 kg (150 lb.) intermittent use	
Wetted Materials	Body	ABS
	Threads	Nylon
	Shield	ABS / 316 SS
	Temperature Probe	316 SS
	O-rings	EPDM

Sensor Specifications	HI7698194-0	HI7698194-1	HI7698194-3	HI7698494-5	
Description	pH sensor	pH/ORP sensor	EC sensor	optical; luminescence quenching DO sensor	
Measurement Type	pH, mV (pH)	pH, mV (pH), ORP	EC	DO (% saturation and concentration)	
Measurement Range	0.00 to 13.00 pH; ±600.0 mV	0.00 to 13.00 pH; ±600.0 mV; ±2000.0 mV	0.0 to 200.0 mS/cm; 0.0 to 400 mS/cm (absolute)	0.0 to 500.0 %; 0.00 to 50.00 mg/L	
Temperature Range	-5 to 55°C	-5 to 55°C	-5 to 55°C	-5 to 55°C	
Color Code	red	red	blue	green	
Materials	Tip	glass (pH)	glass (pH); Pt (ORP)	stainless steel electrodes AISI 316	
	Glass Type	LT (low temperature)	LT (low temperature)	-	
	Junction	ceramic	ceramic	-	
	Body	PEI	PEI	ABS/epoxy	ABS
	Electrolyte	gel	gel	-	-
Reference	double	double	-	-	
Maintenance Solution	HI70300 (storage solution)	HI70300 (storage solution)	none	none	
Dimensions	118 x 15 mm	118 x 15 mm	111 x 17 mm	99 x 17 mm	
Depth	20 m (65')	20 m (65')	20 m (65')	20 m (65')	

Specifications		HI98494
pH / mV	Range	0.00 to 14.00 pH / ±600.0 mV
	Resolution	0.01 pH / 0.1 mV
	Accuracy	±0.02 pH / ±0.5 mV
	Calibration	automatic one-point Quick Calibration using HI9828-25 automatic one, two, or three points with automatic recognition of five standard buffers (pH 4.01, 6.86, 7.01, 9.18, 10.01) or one custom buffer
ORP	Range	±2000.0 mV
	Resolution	0.1 mV
	Accuracy	±1.0 mV
	Calibration	manual at one custom point (relative mV)
EC	Range	0 to 200 mS/cm (absolute EC up to 400 mS/cm)
	Resolution	manual: 1 µS/cm; 0.001 mS/cm; 0.01 mS/cm; 0.1 mS/cm; 1 mS/cm; automatic: 1 µS/cm from 0 to 9999 µS/cm; 0.01 mS/cm from 10.00 to 99.99 mS/cm; 0.1 mS/cm from 100.0 to 400.0 mS/cm; automatic (mS/cm): 0.001 mS/cm from 0.000 to 9.999 mS/cm; 0.01 mS/cm from 10.00 to 99.99 mS/cm; 0.1 mS/cm from 100.0 to 400.0 mS/cm
	Accuracy	±1% of reading or ±1 µS/cm whichever is greater
	Calibration	automatic one-point Quick Calibration using HI9828-25 automatic single point, with six standard solutions (84 µS/cm, 1413 µS/cm, 5.00 mS/cm, 12.88 mS/cm, 80.0 mS/cm, 111.8 mS/cm) or custom point
TDS	Range	0.0 to 400.0 ppt (g/L) (the maximum value depends on the TDS factor)
	Resolution	manual: 1 ppm (mg/L); 0.001 ppt (g/L); 0.01 ppt (g/L); 0.1 ppt (g/L); 1 ppt (g/L); automatic: 1 ppm (mg/L) from 0 to 9999 ppm (mg/L); 0.01 ppt (g/L) from 10.00 to 99.99 ppt (g/L); 0.1 ppt (g/L) from 100.0 to 400.0 ppt (g/L); automatic ppt (g/L): 0.001 ppt (g/L) from 0.000 to 9.999 ppt (g/L); 0.01 ppt (g/L) from 10.00 to 99.99 ppt (g/L); 0.1 ppt (g/L) from 100.0 to 400.0 ppt (g/L)
	Accuracy	±1% of reading or ±1 ppm (mg/L) whichever is greater
	Calibration	based on conductivity calibration
Resistivity	Range	0 to 999999 Ω•cm; 0 to 1000.0 kΩ•cm; 0 to 1.0000 MΩ•cm
	Resolution	dependent on resistivity reading
	Calibration	based on conductivity calibration
Salinity	Range	0.00 to 70.00 PSU
	Resolution	0.01 PSU
	Accuracy	±2% of reading or ±0.01 PSU whichever is greater
	Calibration	based on conductivity calibration
	Compensation	used for DO salinity compensation
Seawater σ	Range	0.0 to 50.0 σ _t , σ ₀ , σ ₁₅
	Resolution	0.1 σ _t , σ ₀ , σ ₁₅
	Accuracy	±1 σ _t , σ ₀ , σ ₁₅
	Calibration	based on conductivity calibration

Dissolved Oxygen	Range	0.0 to 500.0%; 0.00 to 50.00 ppm (mg/L)
	Resolution	0.1%; 0.01 ppm (mg/L)
	Accuracy	±1.5% of reading ± 0.01mg/L for 0.00-20.00mg/L ±5% of reading for 20.00-50.00mg/L ±1.5% of reading ±0.1% for 0.0-200.0% ±5% of reading for 200.0-500.0%
	Calibration	automatic Quick Calibration in water saturated air one or two-point automatic calibration at 100% and 0% manual single point using a value entered by the user in % saturation or mg/L
Atmospheric Pressure	Range	450 to 850 mm Hg; 17.72 to 33.46 in Hg; 600.0 to 1133.2 mbar; 8.702 to 16.436 psi; 0.5921 to 1.1184 atm; 60.00 to 113.32 kPa
	Resolution	0.1 mm Hg; 0.01 in Hg; 0.1 mbar; 0.001 psi; 0.0001 atm; 0.01 kPa
	Accuracy	±3 mm Hg within ±15°C from calibration temperature
	Calibration	automatic at one custom point
Temperature	Range	-5.00 to 55.00°C; 23.00 to 131.00°F; 268.15 to 328.15K
	Resolution	0.01°C; 0.01°F; 0.01K
	Accuracy	±0.15°C; ±0.27°F; ±0.15K
	Calibration	automatic at one custom point
Additional Specifications	Temperature Compensation	automatic from -5 to 55°C (23 to 131°F)
	Logging Memory	45,000 records interval logging or 25,000 records log-on-demand of all parameters
	Logging Interval	one second to three hours
	Connectivity	Bluetooth® using Hanna Lab App USB-C: Host - save logs to USB stick device - appears as .MSD on computer
	Environment	0 to 50°C (32 to 122°F); RH 100% IP67
	Battery Type / Life	1.5V AA batteries (4); built-in Li-ion battery (1) / minimum 200 hours (AA, without backlighting and BLE) minimum 50 hours (Li-ion battery, without backlighting and BLE)
Dimensions / Weight	185 x 93 x 35.2 mm (7.3 x 3.6 x 1.4") / 400 g (14.2 oz.)	
Ordering Information	all models are supplied with: HI7698194-1 pH/ORP sensor, HI7698194-3 EC sensor, HI7698295 short protective probe shield, HI7698494-5 optical DO sensor, HI9828-20 quick calibration solution, zero oxygen solution, HI76984942 probe maintenance kit, HI920016 USB type-C cable, HI7698290 calibration beaker, batteries (4), quality certificate, and instruction manual in a rugged carrying case with custom insert. HI98494 is supplied with HI7698494/4 multiparameter probe with 4m (13') cable HI98494/10 is supplied with HI7698494/10 multiparameter probe with 10m (33') cable HI98494/20 is supplied with HI7698494/20 multiparameter probe with 20m (66') cable HI98494/40 is supplied with HI7698494/40 multiparameter probe with 40m (131') cable	
Accessories	HI710034 orange protective rubber boot	





WolfLabs

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel : 01759 301142

Fax : 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.