

SMALL CENTRIFUGES

# HAEMATOKRIT 200

## HAEMATOCRIT DETERMINATION IN ONLY 7 MINUTES

The HAEMATOKRIT 200 is a fast and efficient centrifuge for determining hematocrit count. It runs at 13,000 RPM and accommodates 24 capillary tubes to a maximum RCF of 16,060.

Results can be clearly viewed with the integrated Haematocrit reader in the rotor lid.



ROTOR INCLUDED



### HIGHLIGHTS

- RPM: 200 - 13,000 min<sup>-1</sup>  
Adjustable up to 10,000 RPM in increments of 10, above in increments of 100
- Max. RCF: 16,060
- Compact, high-performance hematocrit centrifuge
- IVD-conform according to directive 98/79/EC
- maximum noise level of ≤ 56 dB(A)
- impulse key for short cycle mode
- 2 individual acceleration and deceleration stages
- easy operation with keypad

### FEATURES

- plastic housing
- metal lid
- viewing port in the lid
- one-hand lid lock
- lid dropping protection
- emergency lid lock release
- light alloy chamber
- brushless drive
- error display
- imbalance monitoring and switch-off
- backlit panel with actual values of all parameters
- 2 adjustable messages after completion of the centrifugation run (audio + visual)

## TECHNICAL DATA

### HAEMATOKRIT 200

voltage *)	200 – 240 V 1 ~
frequency	50 – 60 Hz
consumption	270 VA
emission, immunity	EN/IEC 61326-1, class B
max. capacity	24 capillaries
max. RPM	13,000 min <sup>-1</sup>
max. RCF	16,060
running time	1 – 99 min, ∞ continuous run, short cycle mode (impulse button)
dimensions (WxDxH)	261 x 353 x 228 mm
weight	approx. 10 kg
max. noise level	≤ 56 dB (A)
<b>Cat. No.</b>	<b>1801</b>

100 – 127 V 1 ~ / 50–60 Hz


1801-01

emission, immunity

FCC class B

\*) Other voltages on request.

## AVAILABLE ROTOR



### Rotor

max. RPM   max. RCF	13,000 min <sup>-1</sup>   16,060
max. capacity	24 capillaries
run up   run down, braked in sec	9   16
angle   max. noise level	90°   56 dB (A)
measuring lid	inclusive
<b>Cat. No.</b>	<b>INCLUSIVE</b>



### Capillaries

Standard	
max. RCF <sup>2)</sup>	16,060
radius in mm	85
<b>Cat. No.</b>	<b>-</b>



### Adapter

boring Ø x L in mm	-
capillaries per rotor	24
<b>Cat. No.</b>	<b>-</b>

### HOLDING TRAYS

The holding trays in rotor 2076 are easy to clean and disposable in the case of glass breakage.



2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers. The max. RCF for glass tubes annotated with footnote 2) is 4,000.

## CERTIFICATIONS / REGISTRATIONS

Product certification:





Product registration:



Company certifications:



## DIMENSIONS

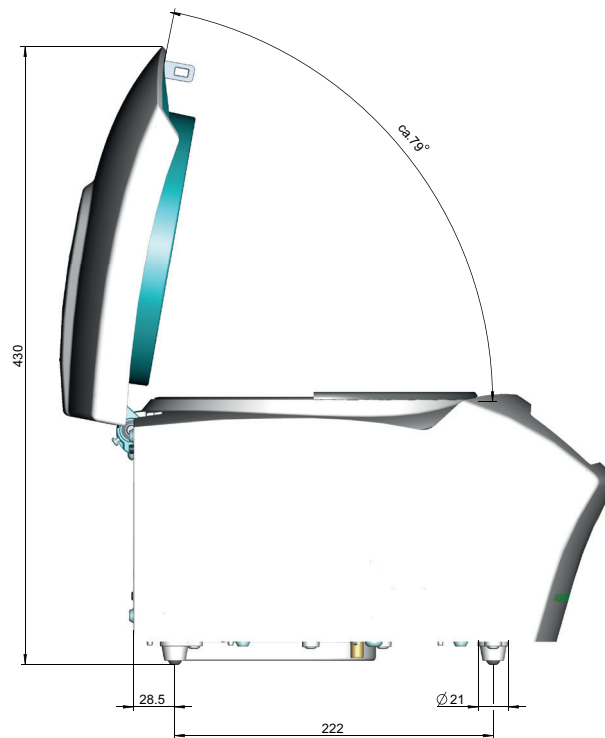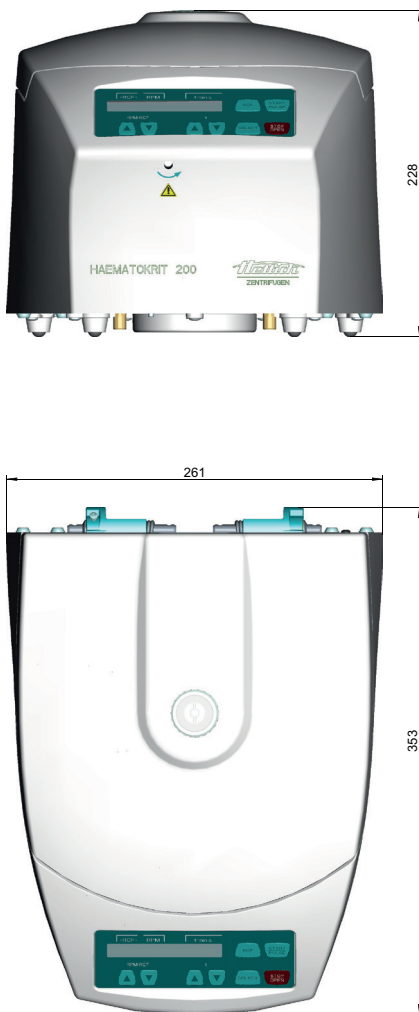



# WolfLabs

**Pricing on any accessories shown can be found by keying the part number into the search box on our website.**

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

**[www.wolflabs.co.uk](http://www.wolflabs.co.uk)**

**Tel : 01759 301142**

**Fax : 01759 301143**

**[sales@wolflabs.co.uk](mailto:sales@wolflabs.co.uk)**

Please contact us if this literature doesn't answer all your questions.