

MICROLITRE CENTRIFUGES

— MIKRO 200 | 200 R

FASTER RESULTS IN MOLECULAR BIOLOGY

The MIKRO 200 are amongst the highest-speed microliter centrifuges in their class. Rotors are designed to spin microliter and PCR tubes. MIKRO 200 achieves a maximum RCF of 21,382 with up to 30 tubes, enabling rapid processing of samples and optimal separation, at low noise levels of 54 dB(A).

This unit is available with refrigeration and a temperature range from -10 °C to +40 °C (MIKRO 200 R).



— HIGHLIGHTS

- RPM: 500 - 15,000 min⁻¹
Adjustable in increments of 10
- max. RCF: 21,382
- max. capacity: 30 x 2.0 ml
- Choice of 4 rotors
- IVDR-conform according to regulation (EU) 2017/746
- impulse key for short cycle mode
- easy operation with keypad and control knob
- 4 program memories for more individuality
- 9 individual acceleration and deceleration stages
- model 200 R coolable from -20 to +40 °C with pre-cooling function

— FEATURES





- metal housing and lid
- viewing port in the lid
- powered one-hand lid lock
- lid dropping protection
- emergency lid lock release
- stainless steel chamber
- automatic rotor recognition
- brushless drive
- error display
- display in °C and °F possible
- imbalance switch-off
- backlit panel with actual values of all parameters
- audio message after completion of the centrifugation run

TECHNICAL DATA

| | MIKRO 200 non-refrigerated | MIKRO 200 R refrigerated |
|------------------------------------------|--------------------------------------------------------------------------|--------------------------------------------------------------------------|
| voltage *) | 200 – 240 V 1 ~ | 200 – 240 V 1 ~ |
| frequency | 50 – 60 Hz | 50 Hz |
| consumption | 240 VA | 450 VA |
| emission, immunity | EN/IEC 61326-1, class B | EN/IEC 61326-1, class B |
| max. capacity | 30 x 1.5 / 2.0 ml | 30 x 1.5 / 2.0 ml |
| max. RPM | 15,000 min ⁻¹ | 15,000 min ⁻¹ |
| max. RCF | 21,382 | 21,382 |
| running time | 1 – 99 min: 59 s, ∞ continuous run, short cycle mode (impulse button) | 1 – 99 min: 59 s, ∞ continuous run, short cycle mode (impulse button) |
| dimensions (WxDxH) | 275 x 344 x 260 mm | 281 x 553 x 260 mm |
| weight | approx. 11.5 kg | approx. 28 kg |
| noise level | ≤ 58 dB (A) with rotor 2434 | ≤ 51 dB (A) with rotor 2437 |
| temperature control, infinitely variable | - | from -10 to +40 °C |
| Cat. No. | 2400 | 2405 |
| 100 – 127 V 1 ~ / 50–60 Hz | 2400-01 | 2405-01 |
| consumption | 270 VA | 630 VA |
| emission, immunity | FCC class B | FCC class B |

*) Other voltages on request.

AVAILABLE ROTORS

| ANGLE ROTORS | angle | max. RPM | max. capacity | Cat. No. | page |
|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------|--------------------------|------------------|---------------|------|
|  angle rotor, 24-place | 45° | 15,000 min ⁻¹ | 24 x 2 ml | 2434 | 3 |
|  angle rotor, 30-place | 45° inside / 55° outside | 15,000 min ⁻¹ | 30 x 2 ml | 2437 | 3 |
|  angle rotor, 24-place for spin column kits | 45° | 15,000 min ⁻¹ | 24 x 2 ml | 2428 | 4 |
|  angle rotor, 4-place | 45° | 15,000 min ⁻¹ | 4 x 8 PCR strips | 2418-A | 4 |

— ANGLE ROTOR, 24-PLACE | 2434



| | |
|----------------------------------|-----------------------------------|
| Rotor | |
| max. RPM max. RCF | 15,000 min ⁻¹ 21,382 |
| max. capacity | 24 x 2 ml |
| run up run down, braked in sec | 20 28 |
| angle max. noise level | 45° 53 dB (A) |
| temperature in °C ¹⁾ | +4 |
| Cat. No. | 2434 |



| | |
|---------------------------------|------------------|
| Lid bioseal⁹⁾ | |
| Cat. No. | INCLUSIVE |



| | | | | | | | |
|------------------------|-------------------------|--------|--------|--------|---------|---------|------------------|
| Vessels | | | | | | | |
| | | | | | | | |
| capacity in ml | 0.2 | 0.4 | 0.5 | 0.8 | 1.5 | 2.0 | 0.5 |
| Ø x L in mm | 6 x 18 | 6 x 45 | 8 x 30 | 8 x 45 | 11 x 38 | 11 x 38 | 10.7 x 46 |
| max. RCF ²⁾ | 21,382 | 21,382 | 21,382 | 21,382 | 21,382 | 21,382 | 20,376 |
| radius in mm | 85 | 85 | 85 | 85 | 85 | 85 | 81 |
| Cat. No. | microliter tubes | | | | | | Pediatric |



| | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|--------------------------|-------------|-------------|
| Adapter | | | | | | | |
| | | | | | | | |
| boring Ø x L in mm | 6 x 40 | 6 x 40 | 8 x 40 | 8 x 40 | 10,2 x 19,3 | 11,2 x 42,6 | 11,2 x 39 |
| vessels per rotor | 24 | 24 | 24 | 24 | 24 | 24 | 12 |
| Cat. No. | 2024 | 2024 | 2023 | 2023 | 2031⁷⁾ | - | 0788 |

— ANGLE ROTOR, 30-PLACE | 2437



| | |
|----------------------------------|--------------------------------------|
| Rotor | |
| max. RPM max. RCF | 15,000 min ⁻¹ 21,382 |
| max. capacity | 30 x 2 ml |
| run up run down, braked in sec | 22 30 |
| angle max. noise level | 45° inside / 55° outside 51 dB (A) |
| temperature in °C ¹⁾ | +4 |
| Cat. No. | 2437 |



| | |
|---------------------------------|------------------|
| Lid bioseal⁹⁾ | |
| Cat. No. | INCLUSIVE |



| | | | | | | | |
|------------------------|-------------------------|--------|--------|--------|---------|---------|------------------|
| Vessels | | | | | | | |
| | | | | | | | |
| capacity in ml | 0.2 | 0.4 | 0.5 | 0.8 | 1.5 | 2.0 | 0.5 |
| Ø x L in mm | 6 x 18 | 6 x 45 | 8 x 30 | 8 x 45 | 11 x 38 | 11 x 38 | 10.7 x 46 |
| max. RCF ²⁾ | 21,382 | 21,382 | 21,382 | 21,382 | 21,382 | 21,382 | 20,376 |
| radius in mm | 85 | 85 | 85 | 85 | 85 | 85 | 81 |
| Cat. No. | microliter tubes | | | | | | Pediatric |



| | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|--------------------------|-------------|-------------|
| Adapter | | | | | | | |
| | | | | | | | |
| boring Ø x L in mm | 6 x 40 | 6 x 40 | 8 x 40 | 8 x 40 | 10,2 x 19,3 | 11,2 x 41,3 | 11,2 x 39 |
| vessels per rotor | 30 | 30 | 30 | 30 | 30 | 30 | 15 |
| Cat. No. | 2024 | 2024 | 2023 | 2023 | 2031⁷⁾ | - | 0788 |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 7) For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters. Cat. No. 2031.

— ANGLE ROTOR, 24-PLACE | 2428



| | |
|----------------------------------|-----------------------------------|
| Rotor | |
| max. RPM max. RCF | 15,000 min ⁻¹ 21,382 |
| max. capacity | 24 x 2 ml |
| run up run down, braked in sec | 20 28 |
| angle max. noise level | 45° 53 dB (A) |
| temperature in °C ¹⁾ | +4 |
| Cat. No. | 2428 |



| | |
|---------------------------------|------------------|
| Lid bioseal⁵⁾ | |
| Cat. No. | INCLUSIVE |



| | | | | | | | | | |
|------------------------|-------------------------|--------|--------|--------|--------|--------|---------------------------|--------|------------------|
| Vessels | | | | | | | | | |
| capacity in ml | 0.2 | 0.4 | 0.5 | 0.8 | 1.5 | 2.0 | 1.5 | 2.0 | 0.5 |
| Ø x L in mm | 6x18 | 6x45 | 8x30 | 8x45 | 11x38 | 11x38 | 11x38 | 11x38 | 10.7x46 |
| max. RCF ²⁾ | 21,382 | 21,382 | 21,382 | 21,382 | 21,382 | 21,382 | 21,382 | 21,382 | 20,376 |
| radius in mm | 85 | 85 | 85 | 85 | 85 | 85 | 85 | 85 | 81 |
| Cat. No. | microliter tubes | | | | | | micro spin columns | | Pediatric |



| | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|--------------------------|-----------|--------------------------|-------------|-------------|
| Adapter | | | | | | | | | |
| boring Ø x L in mm | 6 x 40 | 6 x 40 | 8 x 40 | 8 x 40 | 10,2 x 19,3 | 10,2 x 19 | 10,2 x 19,3 | 11,2 x 42,6 | 11,2 x 39 |
| vessels per rotor | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 24 | 12 |
| Cat. No. | 2024 | 2024 | 2023 | 2023 | 2031⁷⁾ | - | 2031⁷⁾ | - | 0788 |

— ANGLE ROTOR, 4-PLACE | 2418-A



| | |
|----------------------------------|-----------------------------------|
| Rotor | |
| max. RPM max. RCF | 15,000 min ⁻¹ 14,338 |
| max. capacity | 4 x 8 PCR strips |
| run up run down, braked in sec | 19 28 |
| angle | 45° |
| temperature in °C ¹⁾ | +4 |
| Cat. No. | 2418-A |



| | |
|-----------------|--------------|
| Lid | |
| Cat. No. | E3243 |



| | | |
|------------------------|----------|-------------------|
| Vessels | | |
| capacity in ml | 0.2 | 0.2 |
| Ø x L in mm | 6x18 | - |
| max. RCF ²⁾ | 14,338 | 14,338 |
| radius in mm | 57 | 57 |
| Cat. No. | - | PCR strips |



| | | |
|--------------------|------------|------------|
| Adapter | | |
| boring Ø x L in mm | 6,5 x 15,5 | 6,5 x 15,5 |
| vessels per rotor | 32 | 4 x 8 |
| Cat. No. | - | - |

- 1) For cooled versions: Lowest temperature achievable with precooling and max. speed.
- 2) Please note that the RCF values indicated refer only to rotor performance. The max. permissible RCF of tubes used should be verified with the individual manufacturers.
- 5) Tested by the TÜV in conformity with DIN EN 61010, section 2 - 020.
- 7) For centrifugation at high speeds, we recommend to use conical, phenol-resistant adapters. Cat. No. 2031.

CERTIFICATIONS / REGISTRATIONS

Product certification:



Product registration:




according to regulation (EU) 2017/746


Company certifications:



DIMENSIONS – MIKRO 200

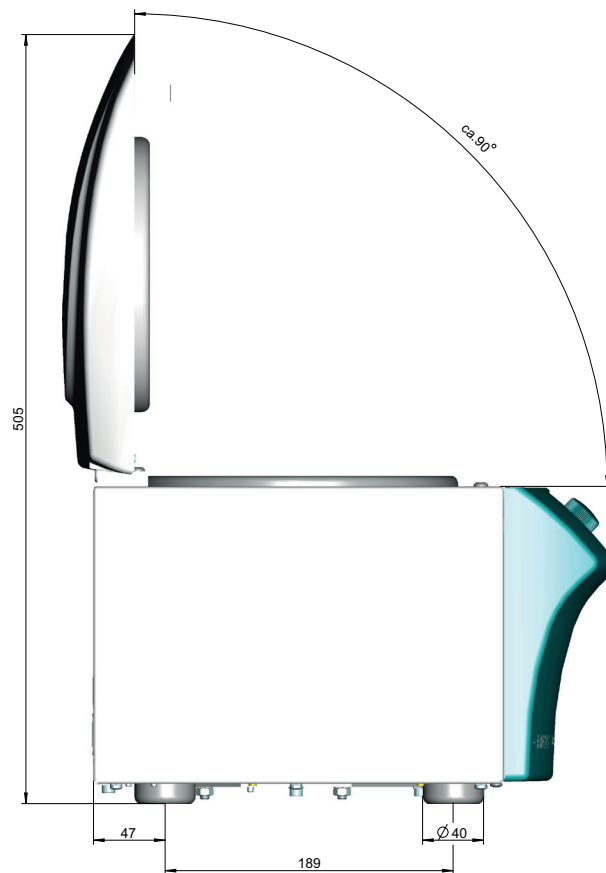

— DIMENSIONS – MIKRO 200 R

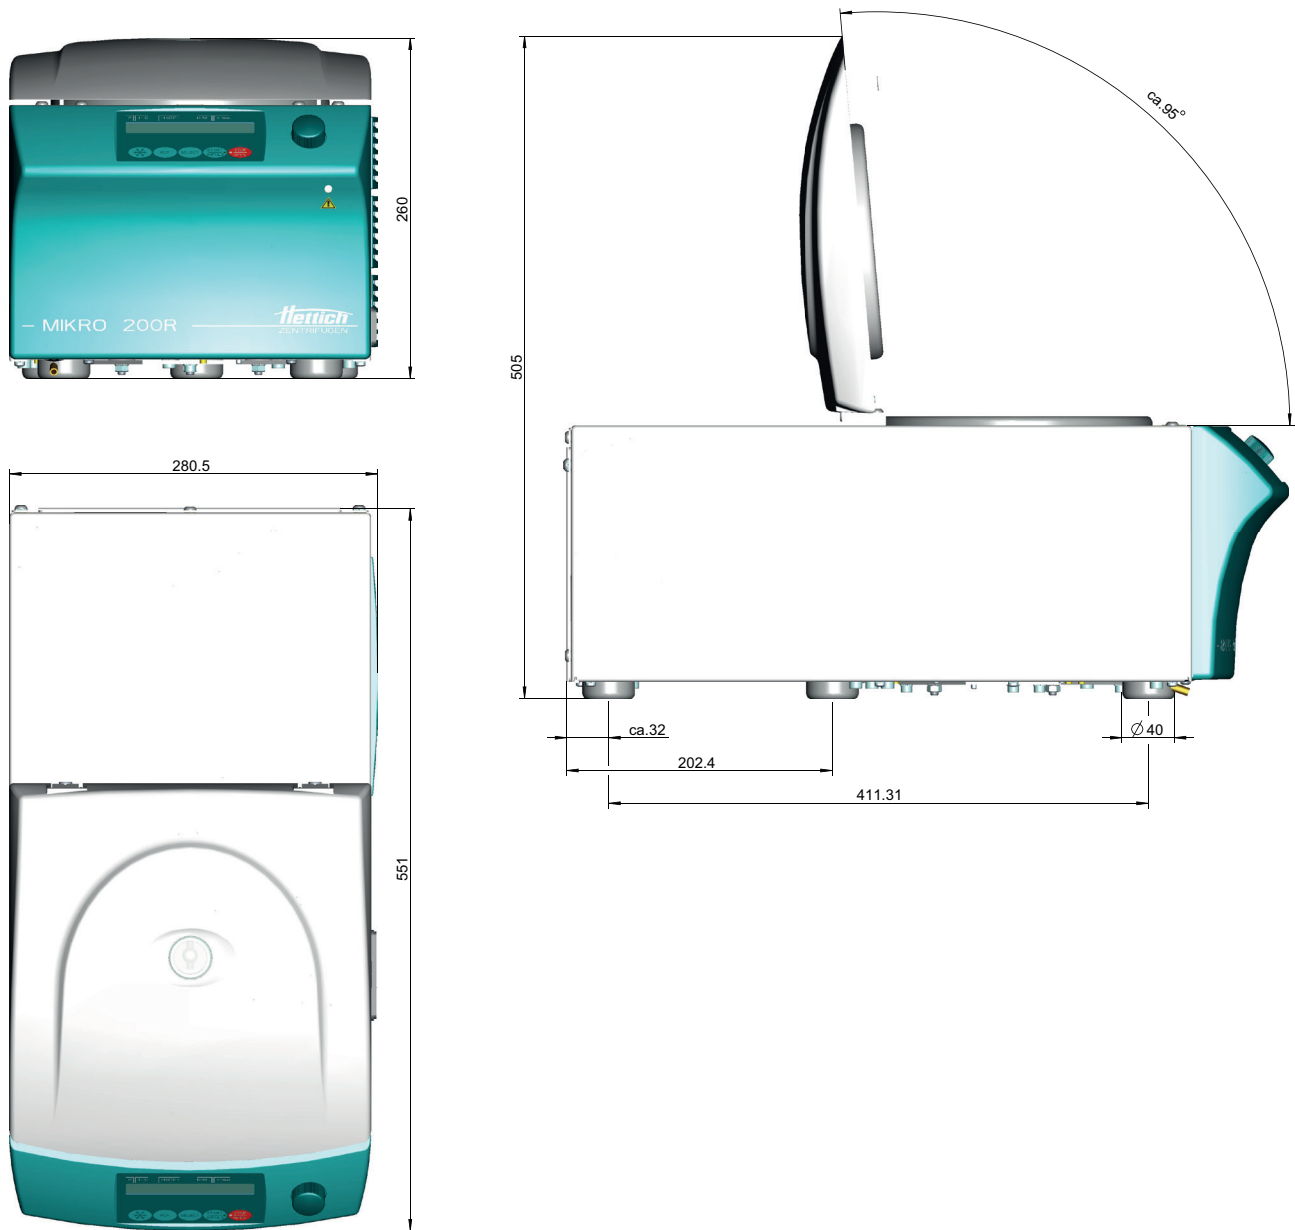



WolfLabs

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel : 01759 301142

Fax : 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.