

PRODUCT DATA SHEET

Standing: 2024-01-22

LAUDA ECO RE 1225 G

Cooling thermostat 230 V; 50 Hz

Part Number: L001367

Features

- Thermostatic bath/circulator with latest microprocessor technology and integrated cooling system
- Coloured TFT display for simultaneous indication of actual & set values and graphic illustration of the temperature profile
- User friendly menu navigation in plain language
- Easy input via cursor and soft keys. Additional Tmax key for overtemperature protection
- Fully electronic continuous controller with PID action
- Safety class III for operation with flammable and non-flammable liquids. Over-temperature cut-out adjustable via menu
- Vario pump with six adjustable performance levels
- Easy control of the flow rate between internal and external circulation during operation without contact with the bath
- USB interface as standard
- Upgradeable with an interface module (analogue module, contact module, RS 232/485 module, Profibus, Ethernet-USB module)
- Upgradeable with Pt 100/LiBus module for external control and remote control via Command console
- Programmer with 150 temperature/time segments that can be separated into 5 programs
- Pump connectors with metal connectors, thread M 16 x 1 as standard
- Bath vessel made from stainless steel with drain valve
- Condenser cooling Air
- Utilizes natural refrigerants



Reserve technical changes



Working temperature min.
-25 °C



Working temperature max.
200 °C

PRODUCT DATA SHEET

Standing: 2024-01-22

LAUDA ECO RE 1225 G

Cooling thermostat 230 V; 50 Hz

Part Number: L001367

Technical Features (according to DIN 12876)

Working temperature range	-25 ... 200 °C
Ambient temperature range	5 ... 40 °C
Temperature stability	0.02 ± K
Heater power max.	2.6 kW
Power consumption max.	2.9 kW
Current max.	13 A
Pump Pressure max.	0,6 bar
Pump flow rate max. (pressure)	22 L/min
Bath volume min. / max.	9.3 / 12.0 L
Size of bath (W x D x H)	200 x 200 x 200 mm
Overall dimensions (WxDxH)	250 x 435 x 624 mm
Weight	31 kg
Power supply	230 V; 50 Hz
Power plug	Power cord with angled plug (BS1363)
Refrigerant stage 1	R-290 (GWP 3); 0.033 kg; 0.0 t CO2-eq

Reserve technical changes

Temperature	Pump stage	Heat transfer liquid	Cooling Capacity 50 Hz
20 °C	2	Ethanol	0.3 kW
0 °C	2	Ethanol	0.24 kW
-20 °C	2	Ethanol	0.09 kW
-25 °C	2	Ethanol	0.04 kW

Standard accessories

- 1 Bath cover

PRODUCT DATA SHEET

Standing: 2024-01-22


LAUDA ECO RE 1225 G

Cooling thermostat 230 V; 50 Hz

Part Number: L001367

Standard accessories

- 2 screw caps, 2 closing plugs
- 2 nipples 13 mm for pump connectors

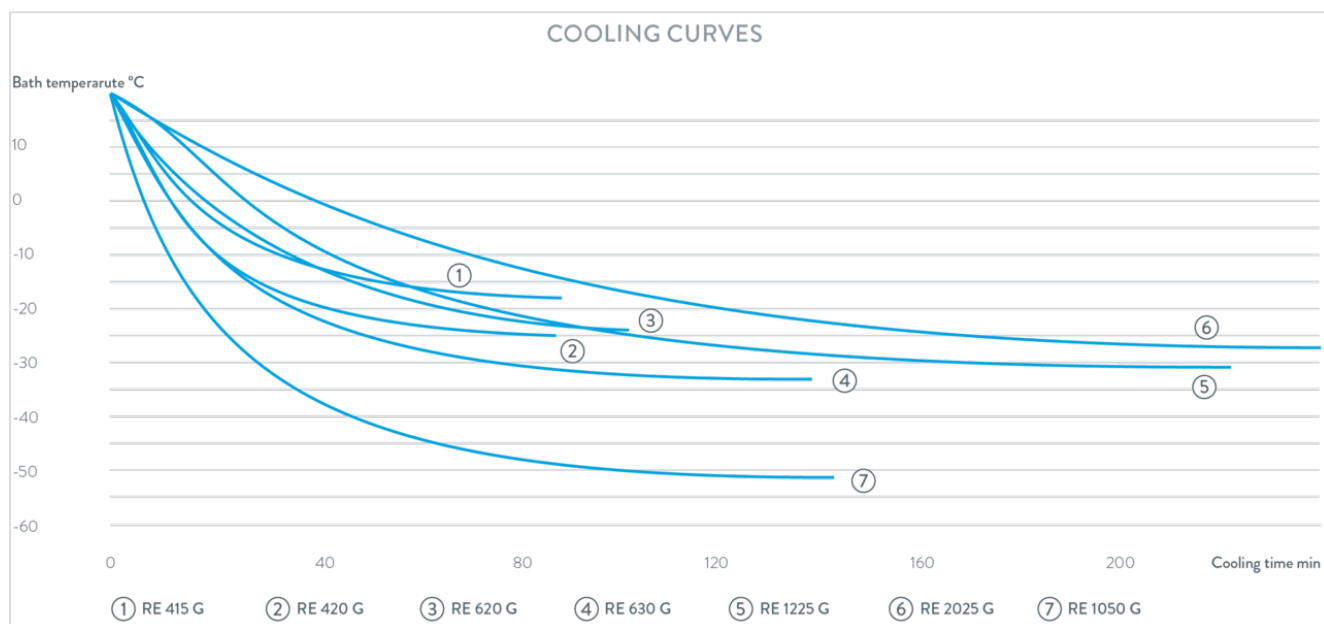

Reserve technical changes

PRODUCT DATA SHEET

Standing: 2024-01-22

LAUDA ECO RE 1225 G

Cooling thermostat 230 V; 50 Hz

Part Number: L001367



Reserve technical changes



WolfLabs

Pricing on any accessories shown can be found by keying the part number into the search box on our website.

The specifications listed in this brochure are subject to change by the manufacturer and therefore cannot be guaranteed to be correct. If there are aspects of the specification that must be guaranteed, please provide these to our sales team so that details can be confirmed.

www.wolflabs.co.uk

Tel : 01759 301142

Fax : 01759 301143

sales@wolflabs.co.uk

Please contact us if this literature doesn't answer all your questions.